


Single face in situ concrete barrier
with a noise protection absorber

BHSEG0/0a-NP-L2W3

Permanent Vehicle Restraint System

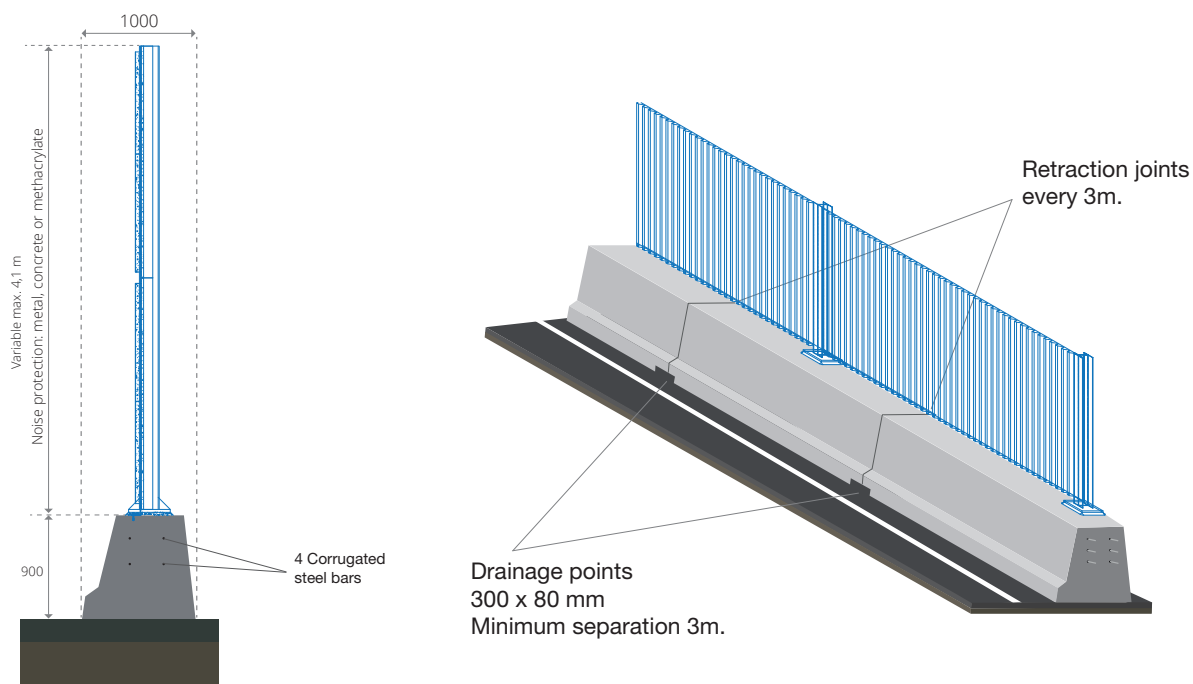

**Parameters of behaviour according to
UNE-EN 1317-2**

Containment level:	L2 (H2 + N2)
Normalized work width level:	1,0 m (W3)
Maximum dynamic deflection:	0 m
Impact severity level:	B
Normalized vehicle intrusion level:	0,5 m (VI1)

Type and characterization of materials

Concrete:	HA-30/P/20/I+F	Resistance to snow removal:	Class 4
Armor:	B 500 SD	Terrain type:	On a layer with bituminous firm or concrete.
Noise Panel:	metal, concrete or methacrylate type SILENZIA	Parts detached:	They do not detach
		Conditions of durability (materials and coatings):	Concrete: XF4 exposure class according to UNE-EN 206-1.
		Manufacturing Procedure:	According to Installation Manual