


New cover of double face in situ concrete barrier

BARCOV-D-H2W2

Permanent Vehicle Restraint System

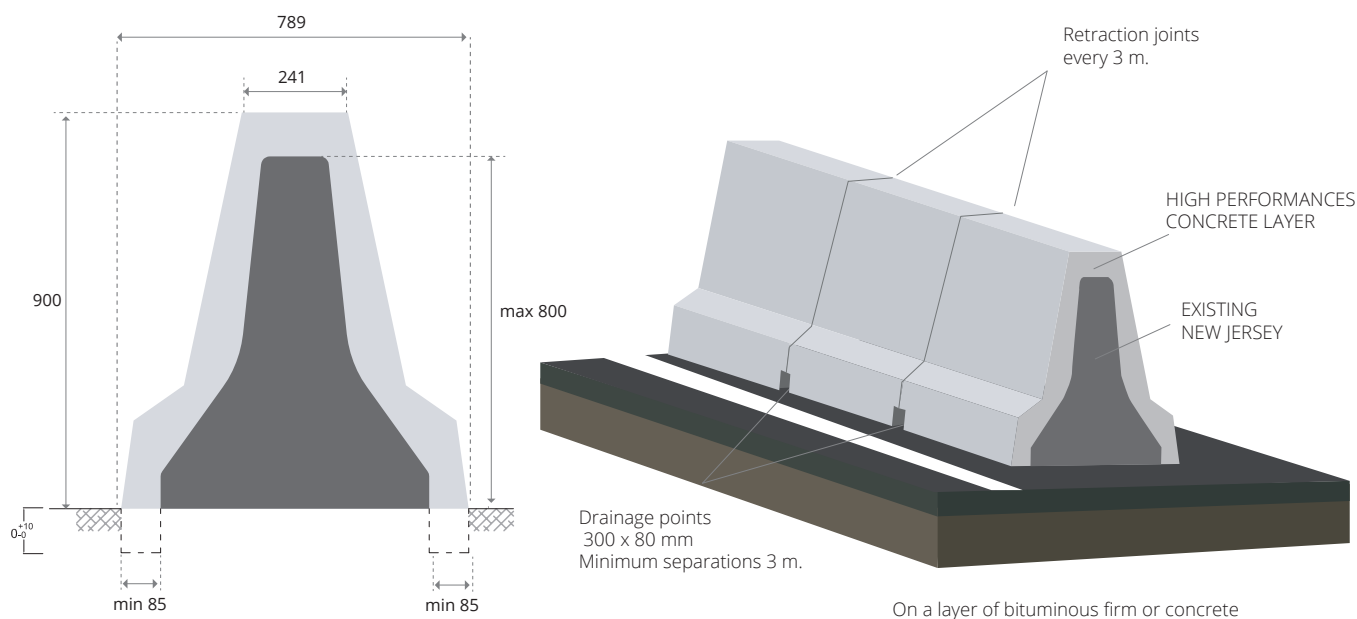

Parameters of behaviour according to UNE-EN 1317-2

Containment level:	H2
Normalized work width level:	0,8 m (W2)
Maximum dynamic deflection:	0 m
Impact severity level:	B
Normalized vehicle intrusion level:	1,2 m (VI4)

Type and characterization of materials:

New Layer Concrete:	HA-30/P/20/I+F	Resistance to snow removal:	Class 4
New Jersey Concrete:	C20/25	Terrain type:	On a layer of bituminous firm or concrete
		Conditions of durability (materials and coatings):	XF4 exposure class according to UNE-EN 206-1.
		Manufacturing Procedure:	According to Installation Manual