
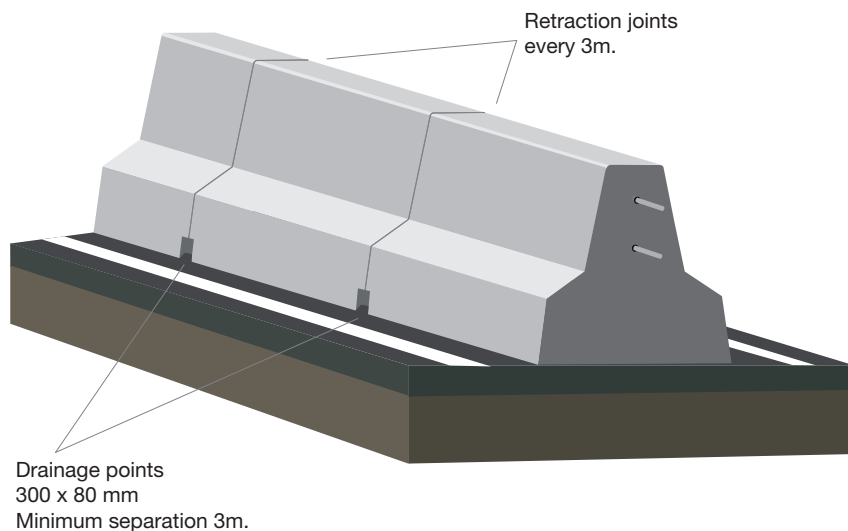


Double face in situ concrete barrier
BHDEG0/0a-H1W1
 Permanent Vehicle Restraint System

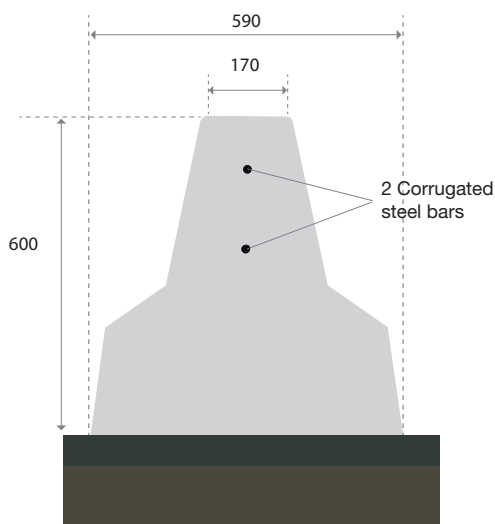

Parameters of behaviour according to UNE-EN 1317-2

Containment level:	H1
Normalized work width level:	0,6 m (W1)
Maximum dynamic deflection:	0 m
Impact severity level:	B
Normalized vehicle intrusion level:	1,8 m (VI5)

Type and characterization of materials:

Concrete:	HA-30/P/I/F	Resistance to snow removal:	Class 4
Armor:	B 500 SD	Terrain type:	On a layer of bituminous firm or concrete
		Parts detached:	They do not detach
		Conditions of durability (materials and coatings):	XF4 exposure class according to UNE-EN 206-1
		Manufacturing Procedure:	According to Installation Manual