
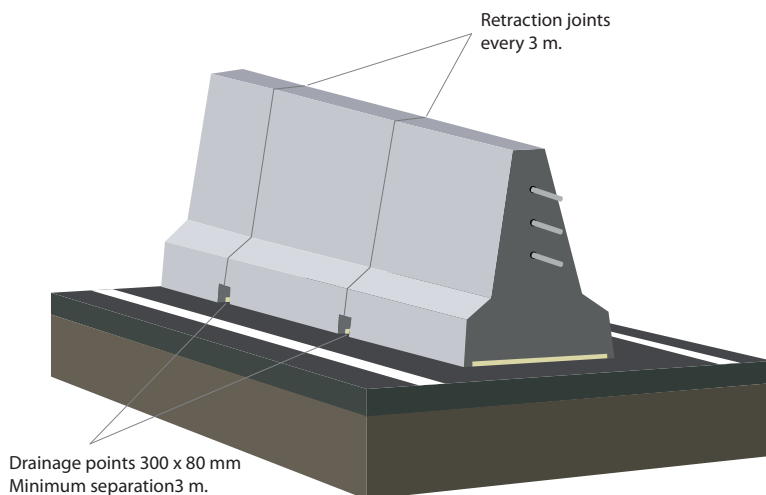


Double face in situ concrete barrier

BHDEG0/0a-H2

Permanent Vehicle Restraint System

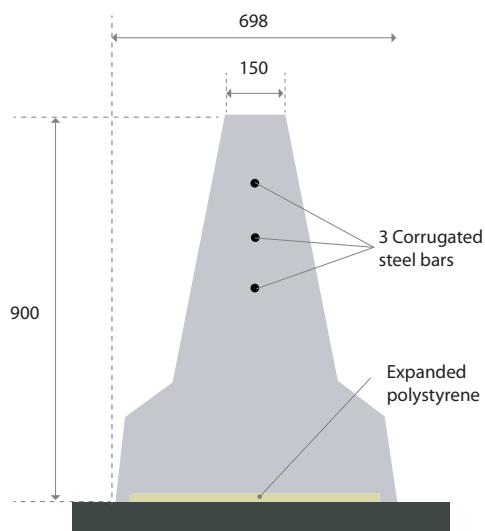

Parameters of behaviour according to UNE-EN 1317-2

Containment level:	H2
Normalized work width level:	1,2 m (W4)
Maximum dynamic deflection:	0,5 m
Impact severity level:	B
Normalized vehicle intrusion level:	1,1 m (VI4)

Type and characterization of materials:

Concrete:	HA-30/P/I/F
Armor:	B 500 SD
Porexpan	Knauf therm th 35

Resistance to snow removal:	Class 4
Terrain type:	Not deformable compact ground against the weight of the restraint system.
Parts detached:	Parts of the system of more than 2 kg are released from the front part and in contact with itself.
Conditions of durability (materials and coatings):	XF4 exposure class according to EN 206-1
Manufacturing Procedure:	According to Installation Manual