
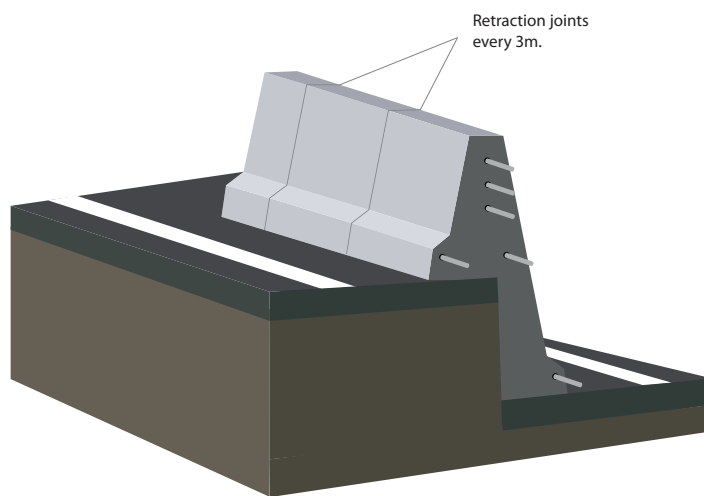


Double face in situ concrete barrier with variable height

BHDEG0/0a-HV-H2W3

Permanent Vehicle Restraint System

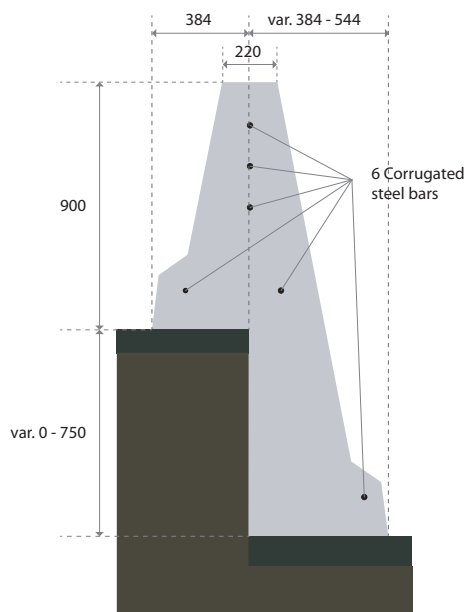

Parameters of behaviour according to UNE-EN 1317-2

Containment level:	H2
Normalized work width level:	1,0 m (W3)
Maximum dynamic deflection:	0 m
Impact severity level:	B
Normalized vehicle intrusion level:	0,7 m (VI2)

Type and characterization of materials:

Concrete:	HA-30/P/I/F
Armor:	B 500 SD

Resistance to snow removal:	Class 4
Terrain type:	On a layer with a minimum thickness of 15 cm of bituminous firm or concrete.
Parts detached:	They do not detach.
Conditions of durability (materials and coatings):	XF4 exposure class according to EN 206-1
Manufacturing Procedure:	According to Installation Manual