
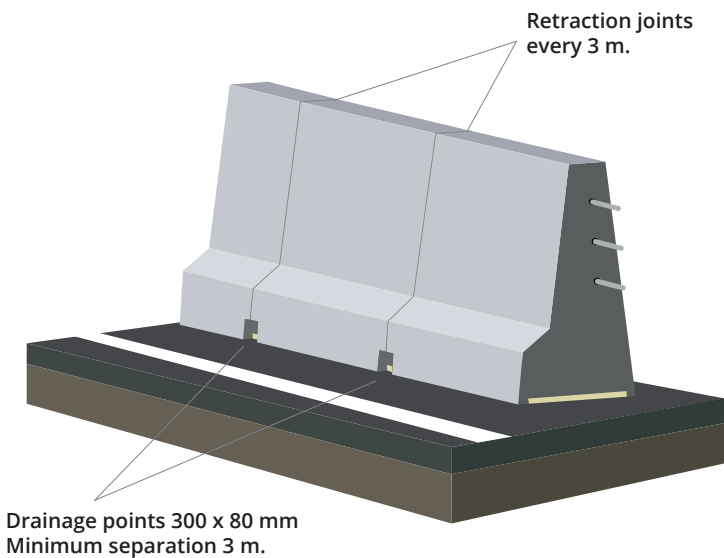


Single face in situ concrete barrier
BHSEG0/0a-H1
 Permanent Vehicle Restraint System

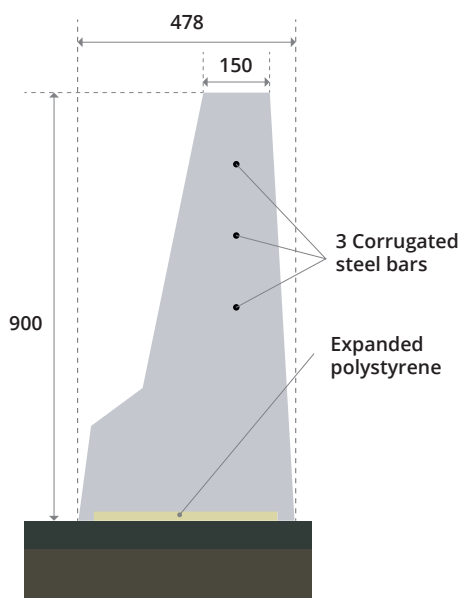

Parameters of behaviour according to UNE-EN 1317-2

Containment level:	H1
Normalized work width level:	0,7 m (W2)
Maximum dynamic deflection:	0,22 m
Impact severity level:	B
Normalized vehicle intrusion level:	1,53 m (V15)

Type and characterization of materials:

Concrete:	HA-30/P/I/F
Armor:	B 500 SD
Porexpan	Knauf therm th 35

Resistance to snow removal:	Class 4
Terrain type:	Not deformable compact ground against the weight of the restraint system.
Parts detached:	Parts of the system of more than 2 kg are released from the front part and in contact with itself.
Conditions of durability (materials and coatings):	XF4 exposure class according to EN 206-1
Manufacturing Procedure:	According to Installation Manual