
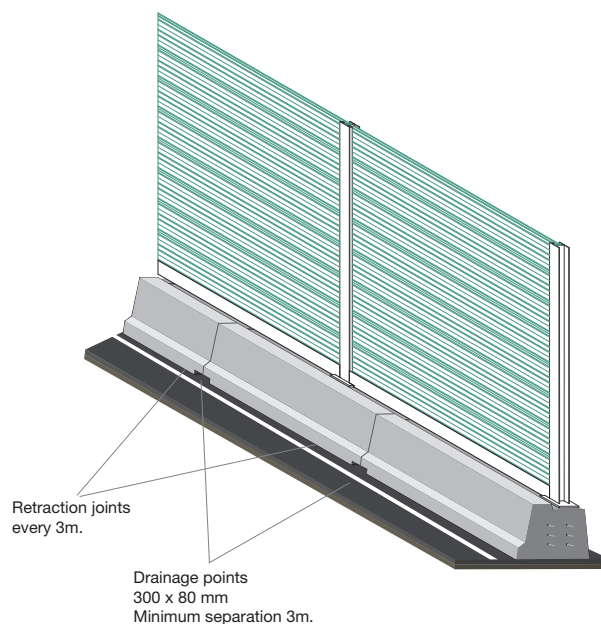


Single face in situ concrete barrier
with noise protection absorber

BHSEG0/0a-NP-H2W5

Permanent Vehicle Restraint System

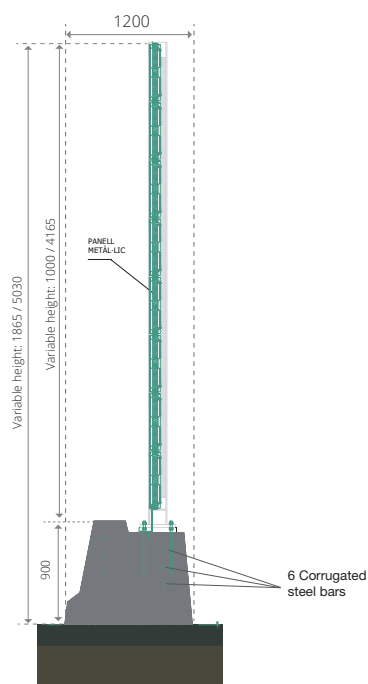

Parameters of behaviour according to UNE-EN 1317-2

Containment level:	H2
Normalized work width level:	1,5 m (W5)
Maximum dynamic deflection:	0,4 m
Impact severity level:	B
Normalized vehicle intrusion level:	1,0 m (VI3)

Type and characterization of materials

Concrete:	HA-30/P/20/I+F
Armor:	B 500 SD
Noise Panel:	Steel type SILENZIA DRA/METAL/IT.1

Resistance to snow removal:	Class 1
Terrain type:	On a layer with bituminous firm or concrete.
Parts detached:	They do not detach
Conditions of durability (materials and coatings):	Concrete: XF4 exposure class according to UNE-EN 206-1. Noise Panel: 4K2 class according to UNE-EN 14389-2
Manufacturing Procedure:	According to Installation Manual