


Single face in situ concrete barrier for bridges

PHSEGO/0a-H4bW2

Permanent Vehicle Restraint System
for bridges



PHSEGO/0a-H4BW2

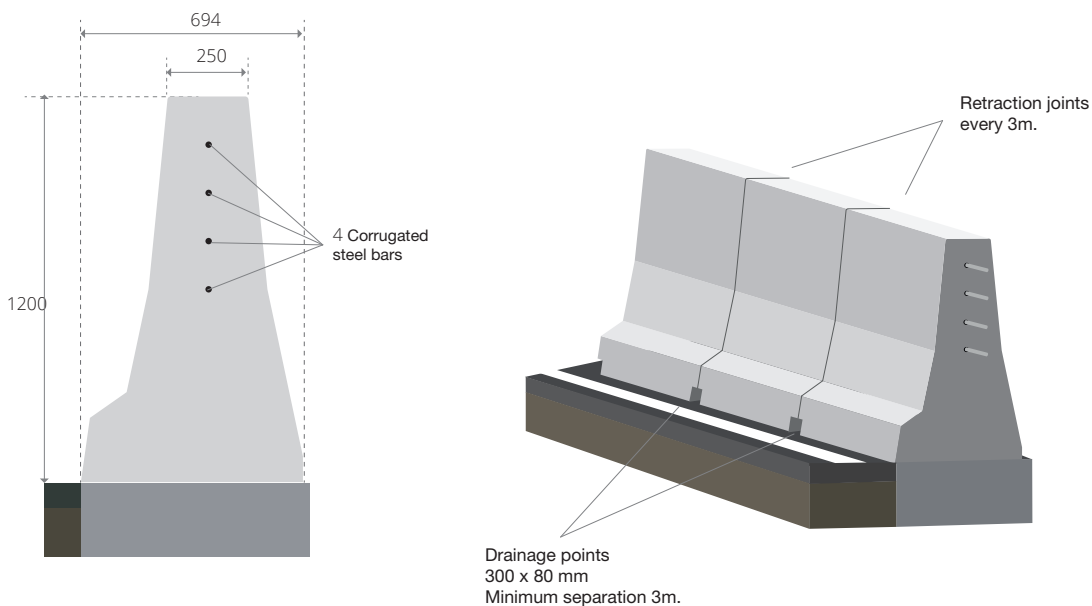

Parameters of behaviour according to UNE-EN 1317-2

Containment level:	H4b
Normalized work width level:	0,8 m (W2)
Maximum dynamic deflection:	0,3 m
Impact severity level:	B
Normalized vehicle intrusion level:	1,6 m (VI5)

Type and characterization of materials:

Concrete:	HA-35/P/20/I+F
Armor:	B 500 SD

Resistance to snow removal:	Clase 4
Terrain type:	On a layer with bituminous firm or concrete.
Conditions of durability (materials and coatings):	XF4 exposure class according to UNE-EN 206-1.
Manufacturing Procedure:	According to Installation Manual