
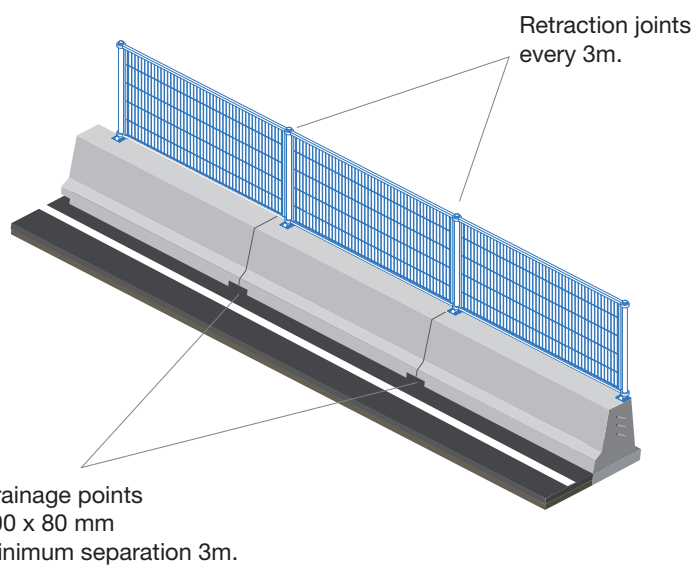


Single face in situ concrete barrier
for vandal-proof fence

PHSEG0/0a-VF-H2W2

Permanent Vehicle Restraint System
for bridges

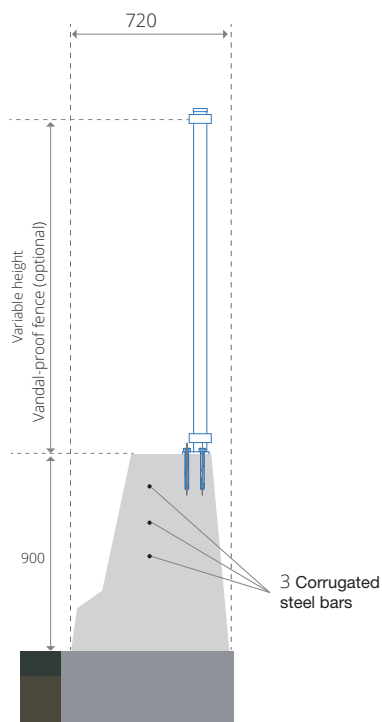

Parameters of behaviour according to UNE-EN 1317-2

Containment level:	H2
Normalized work width level:	0,7 m (W2)
Maximum dynamic deflection:	0 m
Impact severity level:	B
Normalized vehicle intrusion level:	0,5 m (VI1)

Type and characterization of materials:

Concrete:	HA-30/P/20/I+F
Armor:	B 500 SD

Resistance to snow removal:	Class 4
Terrain type:	On a layer with bituminous firm or concrete.
Parts detached:	They do not detach
Conditions of durability (materials and coatings):	XF4 exposure class according to EN 206-1
Manufacturing Procedure:	According to Installation Manual