
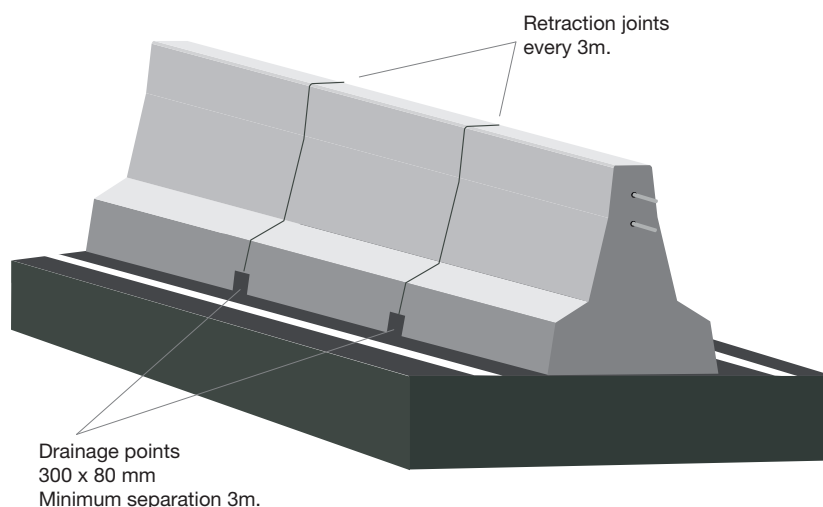


Double face in situ concrete barrier  
**BHDEG0/0a-H2W1**  
 Permanent Vehicle Restraint System

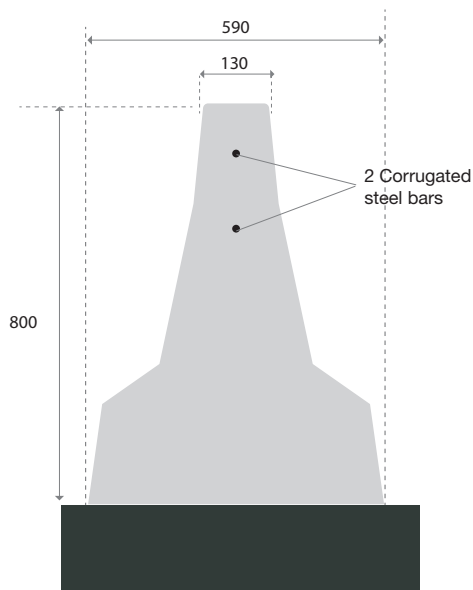

**Parameters of behaviour according to UNE-EN 1317-2**

Containment level:	H2
Normalized work width level:	0,6 m (W1)
Maximum dynamic deflection:	0 m
Impact severity level:	B
Normalized vehicle intrusion level:	0,7 m (V12)

**Initial type tests**

LABORATORIES	TYPE OF IMPACT TEST
APPLUS IDIADA	TB11 – A213006ALGS
CIDAUT	TB51 – E21-0248

**Type and characterization of materials:**

Concrete:	HA-30/P/20/I+F
Armor:	B 500 SD

Resistance to snow removal:	Class 4
Terrain type:	On a layer of bituminous firm or concrete
Conditions of durability (materials and coatings):	XF4 exposure class according to UNE-EN 206-1.
Manufacturing Procedure:	According to Installation Manual