
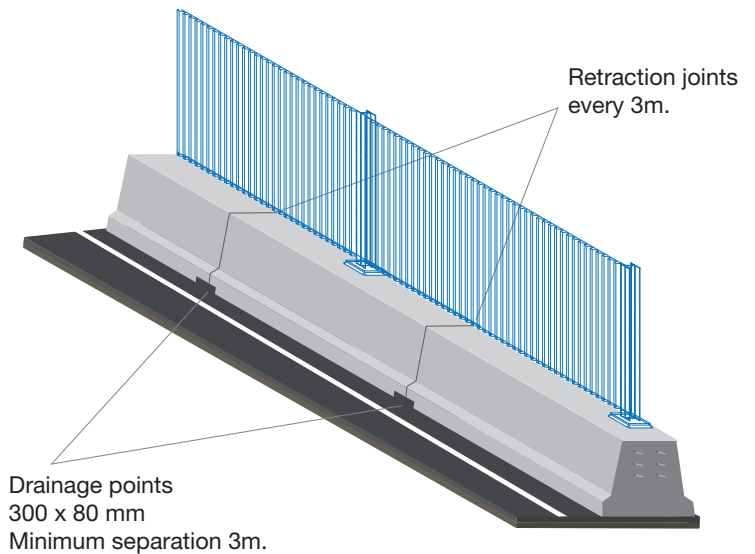


Single face in situ concrete barrier  
for a noise protection absorber  
**BHDEG0/0a-NP-H2W4**  
Permanent Vehicle Restraint System

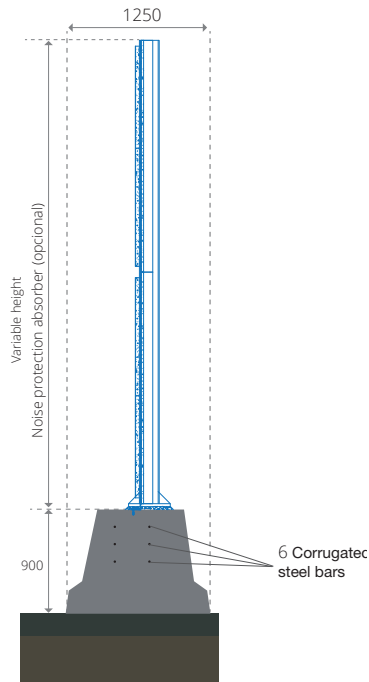

**Parameters of behaviour according to UNE-EN 1317-2**

Containment level:	H2
Normalized work width level:	1,2 m (W4)
Maximum dynamic deflection:	0 m
Impact severity level:	B
Normalized vehicle intrusion level:	0,5 m (VI1)

**Initial type tests**

LABORATORIES	TYPE OF IMPACT TEST
APPLUS IDIADA	TB11 - 144414AI
CIDAUT	TB51 - E18-2128

**Type and characterization of materials:**

Concrete:	HA-30/P/20/I+F	Resistance to snow removal:	Class 4
Armor:	B 500 SD	Terrain type:	On a layer with bituminous firm or concrete.
		Parts detached:	They do not detach
		Conditions of durability (materials and coatings):	XF4 exposure class according to UNE-EN 206-1.
		Manufacturing Procedure:	According to Installation Manual