
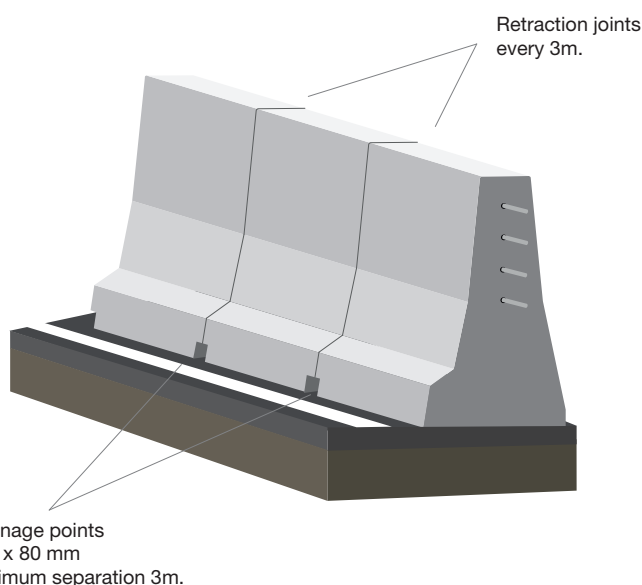


Single face in situ concrete barrier
BHSEG0/0a-H4bW2
 Permanent Vehicle Restraint System

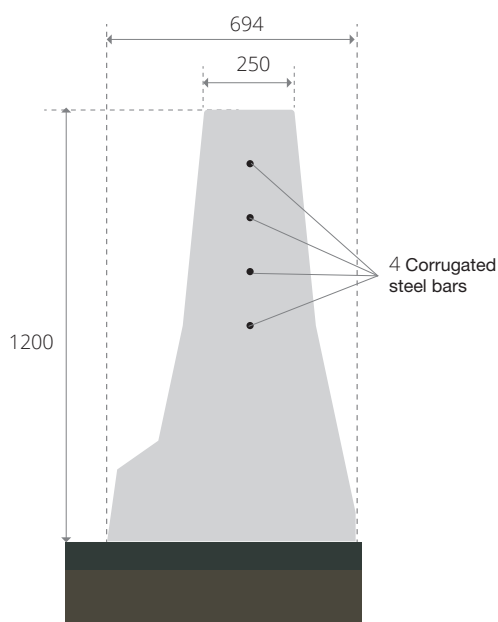

Parameters of behaviour according to UNE-EN 1317-2

Containment level:	H4b
Normalized work width level:	0,8 m (W2)
Maximum dynamic deflection:	0,3 m
Impact severity level:	B
Normalized vehicle intrusion level:	1,6 m (V15)

Initial type tests

LABORATORIES	TYPE OF IMPACT TEST
APPLUS IDIADA	TB11 – A213006ALGS
CIDAUT	TB81 – E21 - 0300

Type and characterization of materials:

Concrete:	HA-35/P/20/I+F	Resistance to snow removal:	Class 4
Armor:	B 500 SD	Terrain type:	On a layer of bituminous firm or concrete
		Conditions of durability (materials and coatings):	XF4 exposure class according to UNE-EN 206-1.
		Manufacturing Procedure:	According to Installation Manual